

Steel Door Frame Options

MANUFACTURED FROM
1.6MM THICK RUSTIC STEEL

TECHNICAL SPECIFICATION

Standard Single Rebate Frame Assembly _____

Standard Double Rebate Frame Assembly _____


Standard Flange Frame Assembly _____

Standard 50mm Frame Assembly _____



Frames are manufactured from 1.6 mm thick 'Rustec' steel with a minimum of six fully adjustable fixing points are provided to each jamb. Most are supplied with unique 'Adjust-2-fit' side channels with each frame. Frames are powder coated to match (or contrast) with the leaf.

Standard Steel Door Frame Options

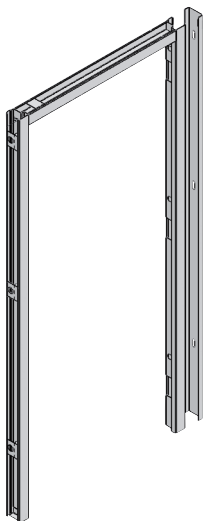

Standard single rebate frame assembly

SIZE	DEPTH (D)
Min	80mm
Max	250mm

Durable, tough and easy to fit, this is Strongdor's most popular frame. Fabricated from strong, lightweight high tensile steel, this is also finished with a high quality powder coating to either match or contract to your door. The superb Adjust-2-Fit side expanders come as standard offering 6 adjustable fixing points per side. This frame demonstrates our vision to make life easy for the installer.


Standard frame depth 104mm



Standard double rebate frame assembly

SIZE	DEPTH (D)
Min	130mm
Max	300mm


Similar in design to the rebate, the double rebate frame shares many of the same features, but is more distinguished for installations that require wider frames. Available up to 300mm deep, this frame is sleek and unobtrusive, the additional folds on the design adding rigidity and strength to wider openings.

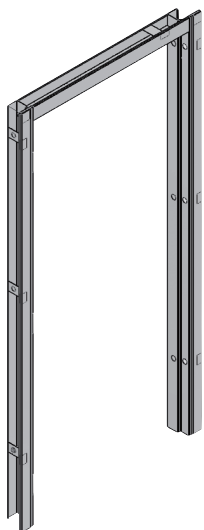

Standard flange frame assembly

SIZE	DEPTH (D)
Min	116mm
Max	116mm

The flange frame is a popular alternative to the single rebate frame, finding favour with modular building manufacturers who appreciate buildings with a neat flanged external finish. Ideally suited to this cutting edge sector of the construction industry, this versatile frame is durable and easy to fit. Inward and outward opening versions have flange to sides and header. Flange size is 30mm.

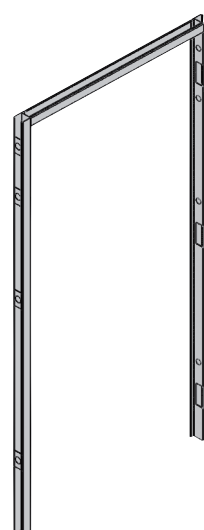

Standard 50mm frame assembly

SIZE	DEPTH (D)
Min	50mm
Max	50mm

Initially designed for use with 50mm internal partitioning systems, this frame is ideal for use on modular concepts such as clean rooms, offices and production area partitioning. The 50mm frame perfectly matches and compliments internal partitioning systems and is also available on our 44mm door leaf.

Bespoke Steel Door Frame Options



Bespoke 4-Sided Frame Assembly

SIZE	DEPTH (D)
Min	104mm
Max	104mm

Durable, tough and easy to fit, this is Strongdor's popular bespoke frame option. Fabricated from strong, lightweight high tensile steel, this is also finished with a high quality powder coating to either match or contract to your door. The superb Adjust-2-Fit side expanders come as standard offering a minimum of 6 adjustable fixing points per side. This frame demonstrates our vision to make life easy for the installer.

Standard frame depth 104mm.

The four-sided frame is ideal for situations where the door's lower edge is positioned above the floor level, such as being installed partway up a wall. This configuration is typical for access points to services or riser doors. Additionally, it is frequently necessary when the door serves as roof access or maintenance access, rather than being designed as a standard pedestrian doorset.

Frame Door-set Options

RANGE	SINGLE REBATE FRAME	DOUBLE REBATE FRAME	STANDARD FLANGE FRAME	STANARD 50MM FRAME	4 - SIDED FRAME
Steeldor	80 - 250mm	130 - 300mm	Yes	Yes	Yes
SteeldorThermal	104mm	No	No	No	No
Firedor	104 - 250mm	130 - 300mm	No	No	Yes
Firedor Thermal	104mm	No	No	No	No
Firedor Latchless	104 - 250mm	130 - 300mm	No	No	No
Securidor PAS 24	104 - 250mm	130 - 300mm	No	No	Yes
Securidor PAS 24 SBD	104 - 250mm	130 - 300mm	No	No	Yes
Securidor SR2	104mm	No	No	No	No
Sportdor	110 - 156mm	No	No	No	No