

Securidor®

PAS 24 Steel Security Door

- EMERGENCY EXITS
- PERSONNEL DOORS

SUITABLE FOR SECURITY
OF BUILDINGS

UNIQUE FEATURES

10-12 day lead time*

1 year warranty

Fast quotes

U value as low as 1.5 W/m²K

*Subject to manufacturing and stock availability

Door pictured is
outward opening



Securidor PAS 24 security doors offer enhanced security performance for internal and external use to enable entry and exit.

Each is built to order, individually constructed with a choice of high security Mico Tindall hardware, offering greater protection to your premises.

01524 487740 www.strongdor.com

150 RAL
COLOURS
AS STANDARD



Securidor® PAS 24:2016 door-set specification

Leaf

44mm door leaf thickness, fitted with an integrated astragal for added security. Comprising of 2 x 1.2mm steel sheets, the leaf skins are mechanically interlocked and internally bonded providing greater stability and protection against de-lamination.

Insulated core as low as 1.5 U-value.

Rebate frame

Manufactured from lightweight, high tensile 1.5 mm thick 'Rustec' steel.

Adjust 2-Fit side expander system that offers up to 12mm expansion to the structural opening.

Strongdor self adhesive neoprene teardrop seal provided as standard.

Various frame depths and styles are available.

Thresholds

AM5 and 96mm outward thresholds available on request.

Finish

Supplied inclusive of a powder coated finish in a standard colour. Full range of RAL and BS colours available.

Acoustic Rating

Up to 39dB rating.

Fire Rating Upgrade

*Fire-rated up to E120 and UKCA | CE marked to BS EN 14351-1 and EN 16034 standards.

Options

Automatic and manual deadlocking.

Single and multi-point locking on inactive and active leaf.

Push pad and push bar options available.

High security Mico Tindall hardware.

Side and over panels available.

Standards

Certified to: PAS 24:2016 Enhanced security performance requirement for door-sets and windows in the UK. Door-sets and windows intended to offer a level of security suitable for dwellings and other buildings exposed to comparable risk.

Max door sizes


(excluding side and over panels)

	Single Door	Double Door
Width	Up to 1360mm	Up to 2610mm
Height	Up to 2550mm	Up to 2550mm



**AVAILABLE WITH
SBD RATING!**

Single-Point Locking

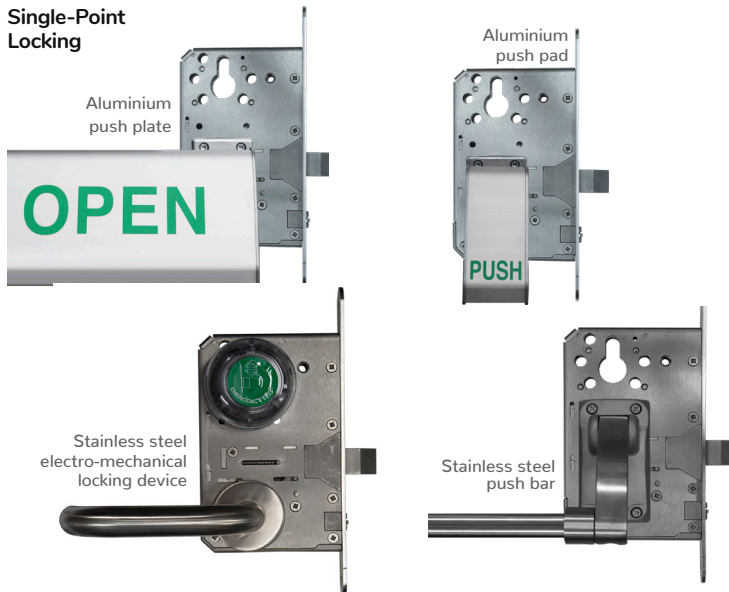

Multi-Point Locking

