



Door pictured is outward opening

Securidor[®]+

S1 Security Rated Steel Door-Set

- EMERGENCY EXITS
- PERSONNEL DOORS

SUITABLE FOR SECURITY OF BUILDINGS

UNIQUE FEATURES

4-6 weeks lead time

Up to 3m high

1 year warranty

Next day quote



The Securidor+ S1 security door range comprises of single and double security-rated steel door-sets that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes leisure facilities, schools and universities, housing association communal areas and general retail outlets.

Please note that these door-sets can only be supplied with outward opening leaves

Leaf

Manufactured from 1.5mm galvanised attack face steel with 1.5mm inner face, the composite door leaf is 45mm thick with astragal lip to the closing edge. It weighs approximately 40kg per square metre.

Frame

The welded frame is made from reinforced 1.5mm galvanised steel and a 38mm x 100mm single rebated profile. It is reinforced at the hinges, lock keeps and fixing points.

Key Features

The range is certified to LPS1175 SR1, and fitted with a double hinge to top of door for additional strength. It also incorporates an anti leverage cover strip to closing edge of door leaf. The door-sets are also Secured by Design approved and are also available with solid over panels and hinged over panels which can be fixed, or removable.

Threshold

Aluminium and Type H threshold - see below.

Hardware

Choice of Exidor 301 Panic Actuator, Exidor 294A SD Panic Bolt available, an optional extra outside access device. Nemeff Triple lockset, Zero Sashlock, Zero Nightlatch, IDC security Escutcheon. Flush Bolts or

12" Monkey Bolts to passive leaf. Keys and cylinders can be registered to eliminate the chance of key copying.

Finish

Wide choice of finishes available including powder coated finish from our range of RAL or BS colours.

Optional Extras

Door Viewer

Certification

Certified by the Loss Prevention Certification Board to LPS 1175 SR1 Issue 7 Cert/LPCB Ref. 1542a

Suitable Substrate

Structural timber or steelwork, blockwork or brickwork/ concrete blockwork.

Minimum Fixing Size - M6/No.12

Installation

It is advised that the installation is carried out by an experienced steel door fitter



LPS1175: Issue 7
Certificate no: 931


Secured by Design




Official Police Security Initiative

	Single Door	Double Door
Width	Up to 1400mm	Up to 2800mm
Height	Up to 3100mm	Up to 3100mm


Typical leaf and frame construction

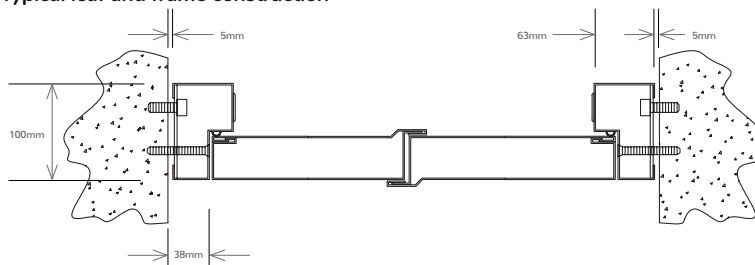


Aluminium threshold with neoprene seal

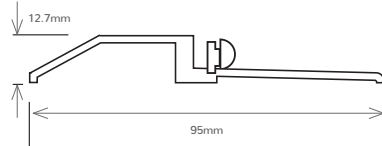

Type H Threshold




Standard door types - other options available

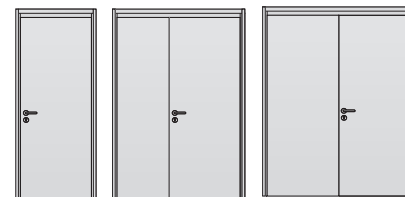

Single personnel door

Leaf and a half personnel door

Double personnel door



Single emergency exit

Double emergency exit