



Door pictured is
outward opening

Securidor®

Securidor S2 Security Rated Steel Door-Sets

- PANIC EXIT DOORS
- PERSONNEL DOORS

SUITABLE FOR SECURITY
OF BUILDINGS

UNIQUE FEATURES

10 - 12 day lead time*

Up to 2.7m high

1 year warranty

Fast quotes

*Subject to manufacturing and stock availability



The Securidor S2 security door range comprises of single and double security-rated steel door-sets that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes leisure facilities, schools and universities, housing association communal areas and general retail outlets.

Please note that these door-sets can only be supplied with outward opening leaves



Leaf

44mm door leaf thickness, fitted with an integrated astragal for added security. Comprising of 2 x 1.5mm 'Rustec' steel sheets, the leaf skins are mechanically interlocked and internally bonded, providing greater stability and protection against de-lamination.

Available with Mineral Board core upgrade.

Frame

Manufactured from lightweight, high tensile 1.5 mm thick 'Rustec' steel.

Adjust 2-Fit side expander system that offers up to 24mm expansion to the structural opening.

Strongdor self adhesive neoprene teardrop as standard.

Single rebate 104mm wide frame

(See Figs. 1, 2, & 3)

Industrial door threshold - 96mm

Standard aluminium threshold is Part M compliant and is fitted with a seal for outward opening door-sets.

Door ironmongery

Available with Mico Modular and MSR Tindall hardware.

Finish

Supplied inclusive of a powder coated finish in a standard colour. Full range of RAL and BS colours available.

Certification

Certified by the Loss Prevention Certification Board to LPS 1175 B3 Issue 8 Cert/LPCB and LPS 1175 A5 Issue 8 Cert/LPCB.

Fire Rating Upgrade

*Fire-rated up to E120 and UKCA | CE marked to BS EN 14351-1 and EN 16034 standards.

Smoke Rating Upgrade

Available smoke-rated to E120Sa4.

Suitable Substrate

Structural timber or steelwork*, or brickwork/ concrete blockwork.

*Not all substrates suitable with fire-rated door-sets.

Installation

It is advised that the installation is carried out by an experienced steel door fitter.

Vision/Louvre Panels

Available in cut-out sizes up to 610mm wide by 1524mm high*.

Size, shape, and position of panels depend on hardware functionality and door leaf dimensions.

Consult our team of steel door experts to discuss your specific requirements in detail.

*Not available with fire rating.

Earth Bonding Upgrade ⚡

Boost safety and meet industry standards with our new Earth Bonding upgrade. This feature enhances protection by providing a secure grounding point, offering peace of mind in environments where electrical safety is critical.



LPS 1175: Issue 8
Cert/LPCB ref. 1542d



Fig.1 Single door with single rebate frame assembly

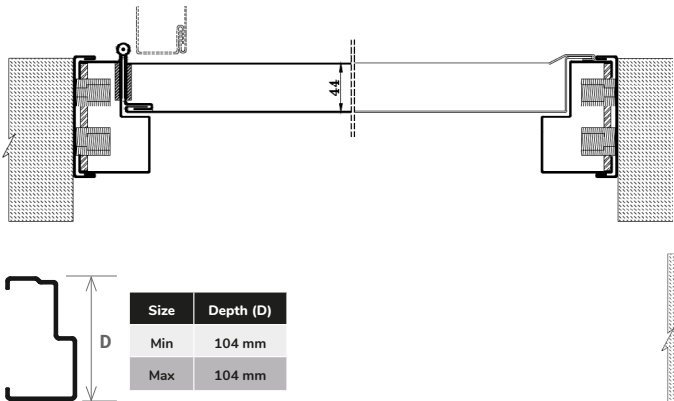


Fig. 2 3 sided single rebate frame assembly

Structural Opening	Single Door	Double Door
Width	Up to 1320mm	Up to 2200mm
Height	Up to 2700mm	Up to 2700mm

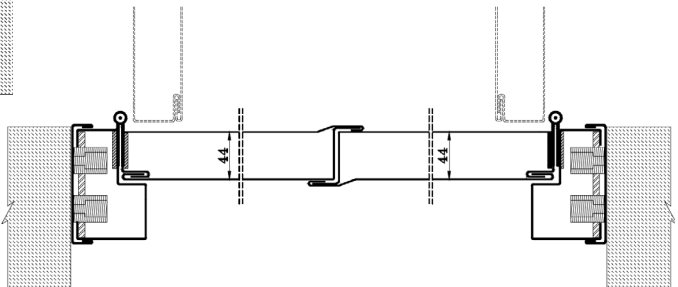


Fig. 3 Double door with single rebate frame assembly