



Door pictured is outward opening

# SecuriDor<sup>®</sup>+

## S3 Security Rated Steel Door-Set

- EMERGENCY EXITS
- PERSONNEL DOORS

SUITABLE FOR SECURITY OF BUILDINGS

### UNIQUE FEATURES

4-6 week lead time

Up to 3m high

1 year warranty

Steel door experts



The SecuriDor+ S3 security door range comprises of single and double security-rated steel door-sets that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes retail outlets, cash rooms, warehouses and utility sub stations.

Please note that these door-sets can only be supplied with outward opening leaves.



Leaf

Manufactured from 1.5mm galvanised attack face steel with 1.5mm inner face, the composite door leaf is 51mm thick with astragal lip to the closing edge. It weighs approximately 80kg per square meter.

Frame

The welded frame is made from reinforced 1.5mm galvanised steel and a 38mm x 100mm single rebated profile. It is reinforced at hinges, lock keeps and fixing points.

Key Features

The range is certified to LPS1175 SR3, and fitted with doubled hinges for additional strength. It also incorporates an anti leverage cover strip to closing edge of door leaf. The door-sets are also Secured by Design approved and are also available with louvres.

Standard threshold

Leading face fits under the door - see below

Hardware

Choice of Hooply Cefiro multipoint lock, Mico Tindall AD1 push pad, Mico Tindall AD2 full push pad, Mico Tindall AD3 lever handle, Mico Tindall MD1 push pad, Mico Tindall MD2 full push pad and Mico Tindall MD3 lever handle hardware. Heavy duty

tower bolts on the passive leaf. Keys and cylinders can be registered to eliminate the chance of key copying.

Finish

Wide choice of finishes available including powder coated finish from our range of RAL or BS colours.

Optional Extras

Louvre Panels (subject to hardware)  
305 - 800mm wide by 305 - 1025m high  
(Not available with panic hardware)

Certification

Certified by the Loss Prevention Certification Board to LPS 1175 SR3 Issue 7 Cert/LPCB Ref. 1542a

Suitable Substrate

Brickwork/concrete blockwork, or structural steelwork.

Minimum Fixing Size - M10

Acoustic Rating

Est 35dB

Installation

It is advised that the installation is carried out by an experienced steel door fitter



LPS1175: Issue 7  
Certificate no: 931


Secured by Design




Official Police Security Initiative

Structural Opening	Single Door	Double Door
Width	Up to 1400mm	Up to 2510mm
Height	Up to 3060mm	Up to 3060mm


Typical leaf and frame construction

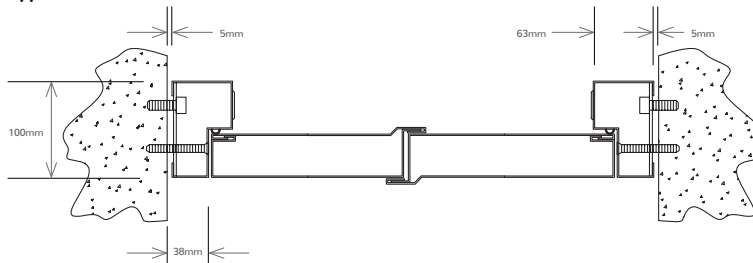


Standard threshold



Standard door types - other options available



Single door

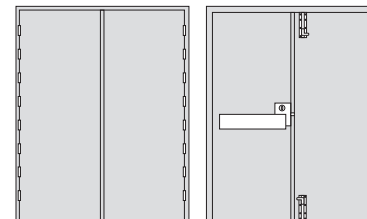

Double door